

摇闪亮，买铭亮

WM-BRIGHT

铭亮
PLIC




Email: faith@wm-bright.com

地址：佛山市南海区桂城街道美生桃花源科技创新园4栋14楼

Address: Room 1401, Building 4, Meisheng Taoyuan Valley Science and Technology Innovation Park, Sanshan Ave., Guicheng St., Nanhai Dist., Foshan City, China

广州市伟铭国际贸易有限公司

Guangzhou Weiming stage lights Co., LTD

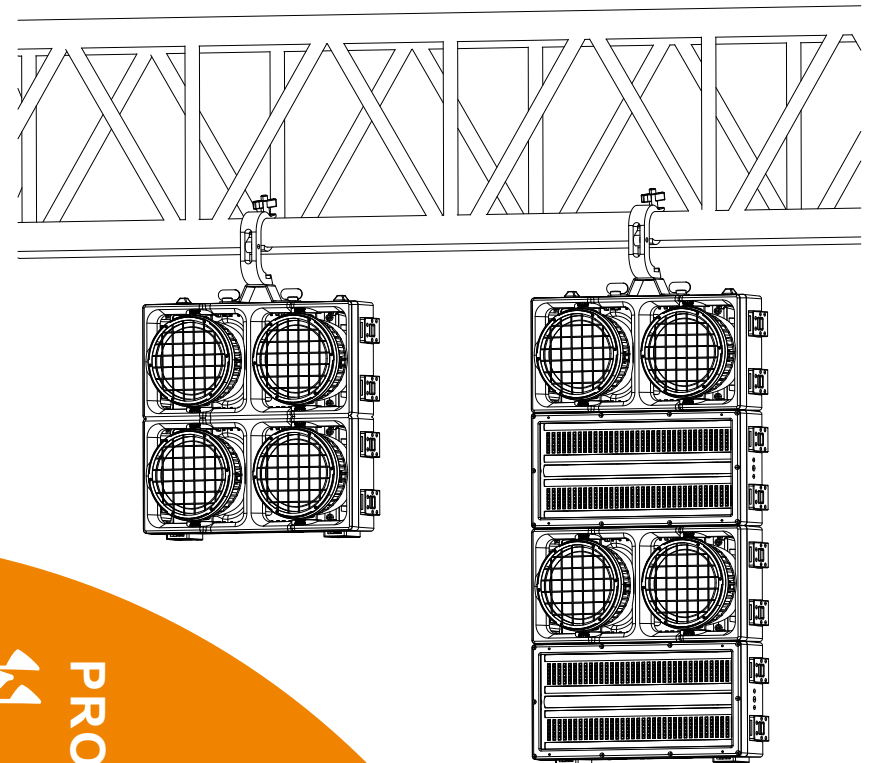

产品目录
PRODUCTS CATALOG



广东铭亮科技有限公司，前身为2008年成立的广州铭亮舞台灯光设备有限公司，历经十八年深耕，从小型舞台灯光生产厂，成长为集大功率户外防水舞台灯光研发、制造、工程服务于一体的专精企业，深耕舞台灯光与文化娱乐融合领域，是国内外演出、大型晚会、文化娱乐，建筑亮化标杆企业，业务覆盖全国并远销海外。


Colorful Light Technology Co., Ltd. was originally established as Colorful Light Co., Ltd. in 2008. After 18 years of dedicated development, it has grown from a small stage lighting manufacturer into a specialized enterprise integrating R&D, manufacturing and engineering services for high-power outdoor waterproof stage lighting.

Focusing on the integration of stage lighting and cultural entertainment, the company is a benchmark enterprise in performances, large-scale galas, cultural entertainment and architectural lighting. Its business covers the whole country and is exported overseas.

团队 Team



展厅 Showroom

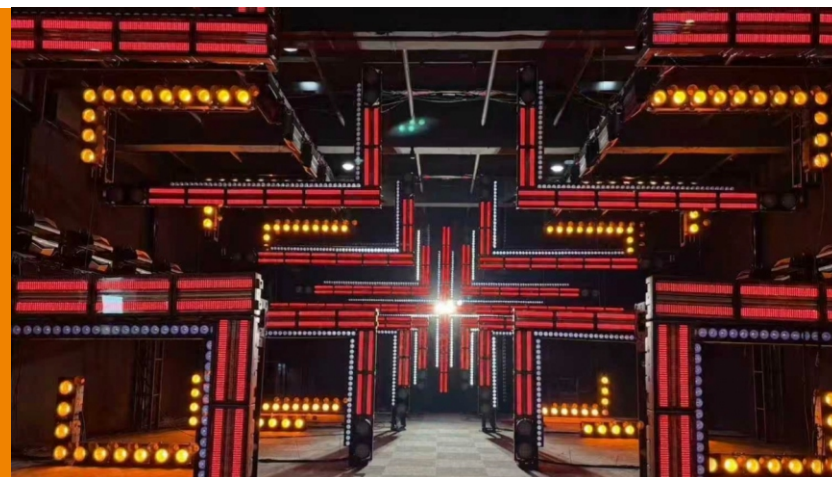

车间 Workshop



案例 CASES



<EN> 演唱会

Concert



<周深> 演唱会

Concert



<太湖湾> 音乐节

Music Festival



<澳门·水弹> 音乐节

Music Festival



<邓紫琪> 演唱会

Concert



<F4> 演唱会

Concert



<OPPO·造乐> 音乐节

Music Festival



<麦田> 音乐节

Music Festival



<汪峰> 演唱会

Concert



<时代少年团> 演唱会

Concert



<可爱冠军的诞生> 湖南卫视舞台

TV Show



<梅赛德斯-奔驰粤港澳大湾区> 车展

Car Show

案例 CASES

认证 Certifications



专利 Patents



荣誉 Honors & Awards



P1/2



COMET SPRO / S2000

P3/4



COMET SIP / S1000

P5/6



EPIC BLINDER / PJ500

P7/8



EPIC STROBE / PJ500S

P9/10



ACED2420S

P11/12



ACED2420

P13/14



ACED4820S

P15/16



ACED4820

P17/18



EPIC PAR

P19/20



FLAMINGO PAR

P21/22



PATT IP

P23/24




FOLLOW 1200IP

CONTENTS




COMET SPRO

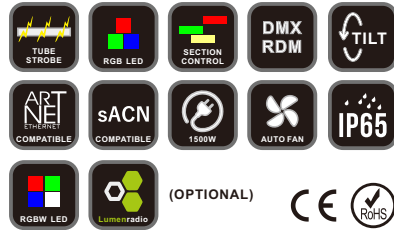


PHOTOMETRICS

Strobe tube (Lux)	64,688	10,450	5,103	1,693
RGB panel (Lux)	6,721	1,192	580	183

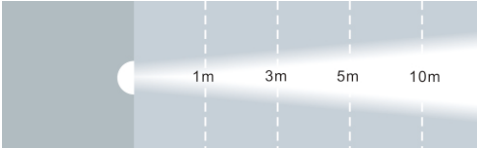

DIMENSION

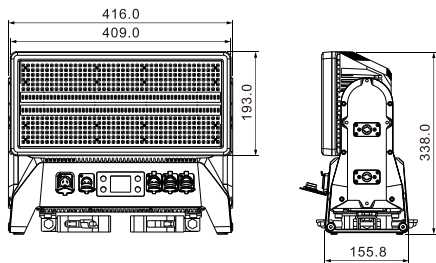

OPTIONAL ACCESSORIES

OPTIC

Source: 280x5W 6500K white (Tube LED)
504x1.5W RGB 3in1
or RGBW 4in1 (Panel LED)
Pixel Section: 2x14 sections (Strobe tube)
2x7 sections (RGB panel)
Source lifetime: >20,000 H

EFFECT

Strobe: power strobe
Dimming mode: 3 modes
Built-in program: yes
Tilt movement: 185°

CONTROL & PROGRAM

Channel: 8 / 18 / 25 / 95 / C8 / C11 / C13 / C24 / C30 / C47 / C68 / C74 / C97 channel modes
Protocol: DMX512, RDM, Art-Net, sACN
W-DMX: LumenRadio (optional)
Power connector: SEETRONIC True1 In
DMX connector: SEETRONIC 3pin or 5pin XLR
Art-Net connector: SEETRONIC RJ45
Display: TFT LCD touch panel

SOFTWARE

Via DMX signal to update
Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
Intelligent speed control fan

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
Rated power: 1500 W

OTHER

IP rating: IP65
Work environment: -40°C ~ 45°C
Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

Size: 416x156x338 mm
Net weight: 13.0 kg
Packaging size: 56x43x25 cm
Packaging weight: 16.0 kg




S2000




照度图

频闪管 (Lux)	64,688	10,450	5,103	1,693
背光 (Lux)	6,721	1,192	580	183

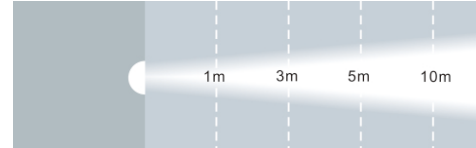

尺寸图

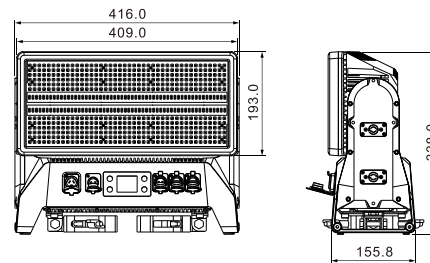

选配件

光源

光源: 280x5W 6500K 白光 (频闪管)
504x1.5W RGB 3合1 或 RGBW 4合1(背光)
分段: 2x14段 (频闪管)
2x7段 (背光)
光源寿命: >20,000 小时

效果

频闪: 多样频闪效果和爆闪
调光模式: 3种
内置程序: 多种
Y轴旋转: 185°

控制

通道: 8 / 18 / 25 / 95 / C8 / C11 / C13 / C24 / C30 / C47 / C68 / C74 / C97 通道模式
通讯协议: DMX512, RDM, Art-Net, sACN
无线: 瑞典LumenRadio (可选)
电源接口: 西尚 True1 进
信号接口: 西尚 三芯或五芯信号进出
网络接口: 西尚 RJ45进出
显示: 液晶触摸屏

软件

可通过DMX连接电脑来升级程序
智能温控管理系统

结构

压铸铝机身
配备智能调速散热防水风扇

电压功率

输入电源: AC 110V-240V 50/60Hz
额定功率: 1500 W

其它


防护等级: IP65
工作温度: -40°C ~ 45°C
启动环境温度: -20°C ~ 45°C

尺寸和重量

灯具尺寸: 416 × 156 × 338 mm
灯具净重: 13.0 kg
纸箱包装尺寸: 56x43x25 cm
纸箱包装毛重: 16.0 kg




COMET SIP

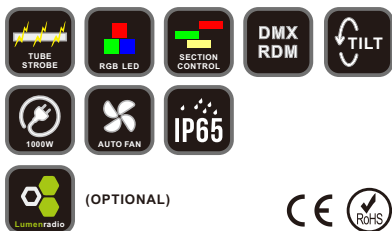


PHOTOMETRICS

Strobe tube (Lux)	46,880	6,460	3,092	928
RGB panel (Lux)	5,422	807	390	112

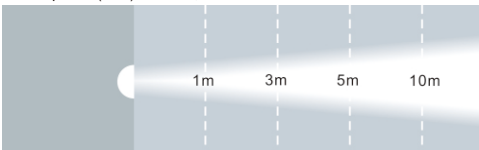

DIMENSION

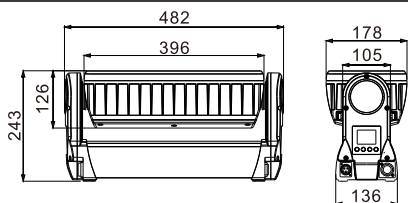

OPTIC

Source: 144x5W 6500K white (Tube LED)
480x1.5W RGB 3in1 (Panel LED)
Pixel Section: 4 sections (Strobe tube)
2x4 sections (RGB panel)
Source lifetime: >20,000 H

EFFECT

Strobe: power strobe
Dimming mode: 5 modes
Built-in program: yes
Tilt movement: 185°

CONTROL & PROGRAM

Channel: 7 / 14 / 16 / 42 / 44 channel modes
Protocol: DMX512, RDM
W-DMX: LumenRadio (optional)
Power connector: SEETRONIC True1 In&Out
DMX connector: SEETRONIC 3pin or 5pin XLR
Display: TFT LCD touch panel

SOFTWARE

Via DMX signal to update
Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
Intelligent speed control fan

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
Rated power: 1000 W

OTHER

IP rating: IP65
Work environment: -40°C ~ 45°C
Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

Size: 482x178x243 mm
Net weight: 10.0 kg
Packaging size: 64x35x22 cm
Packaging weight: 12.5 kg




S1000




照度图

频闪管 (Lux)	46,880	6,460	3,092	928
背光 (Lux)	5,422	807	390	112

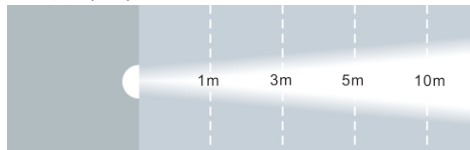

尺寸图

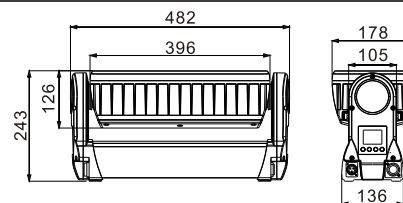

光源

光源: 144x5W 6500K 白光 (频闪管)
480x1.5W RGB 3合1 (背光)
分段: 4段 (频闪管)
2x4段 (背光)
光源寿命: >20,000 小时

效果

频闪: 多样频闪效果和爆闪
调光模式: 5种
内置程序: 多种
Y轴旋转: 185°

控制

通道: 7 / 14 / 16 / 42 / 44 通道模式
通讯协议: DMX512, RDM
无线: 瑞典LumenRadio (可选)
电源接口: 西尚 True1 进出
信号接口: 西尚 三芯或五芯信号进出
显示: 液晶触摸屏

软件

可通过DMX连接电脑来升级程序
智能温控管理系统

结构

压铸铝机身
配备智能调速散热防水风扇

电压功率

输入电源: AC 110V~240V 50/60Hz
额定功率: 1000 W

其它

防护等级: IP65
工作温度: -40°C ~ 45°C
启动环境温度: -20°C ~ 45°C

尺寸和重量

灯具尺寸: 482 × 178 × 243 mm
灯具净重: 10.0 kg
纸箱包装尺寸: 64x35x22 cm
纸箱包装毛重: 12.5 kg

EPIC BLINDER



OPTIC

Source: 2x475W RGBLAC LED (Main light)
64x0.2W RGB 3in1 LED (Led ring)
Beam angle: $\geq 60^\circ$
CCT: 1800K ~ 8500K
Source lifetime: >20,000 H

EFFECT

Strobe: 1~25HZ
Dimming frequency: 1KHz ~ 25KHz
Dimming curves: Linear / Square / Anti-square / S-Curve
Tungsten bulb effect: yes
Built-in program: yes
Build-in color card: yes

CONTROL & PROGRAM

Channel: 20 channel modes
Protocol: DMX512, RDM
Power connector: SEETRONIC True1 In&Out
DMX connector: SEETRONIC 3pin & 5pin XLR
Display: TFT LCD touch panel

SOFTWARE

Via DMX signal to update
Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
Intelligent speed control fan
Possibility to connect devices to each other
Possibility to adjust eyes angle

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
Rated power: 500 W

OTHER

IP rating: IP65
Work environment: $-40^\circ\text{C} \sim 45^\circ\text{C}$
Startup environment: $-20^\circ\text{C} \sim 45^\circ\text{C}$


SIZE & WEIGHT

Size: 420x200x249 mm
Net weight: 8.8 kg
Packaging size: 54x30x25.5 cm
Packaging weight: 10.5 kg




PHOTOMETRICS

Main light (Lux)	28,264	4,656	1,916	546
------------------	--------	-------	-------	-----

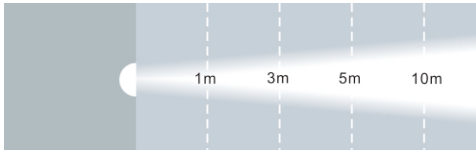

DIMENSION

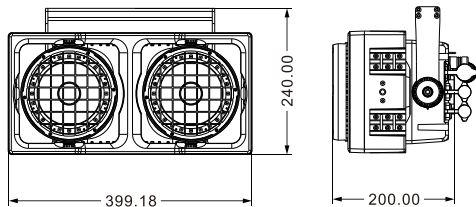

COMBINATIONS



PJ500



光源

光源: 2x475W RGBLAC 6合1 LED (主光)
64x0.2W RGB 3合1 LED (光圈)
角度: $\geq 60^\circ$
色温: 1800K ~ 8500K
光源寿命: >20,000 小时

效果

频闪: 1~25HZ
调光频率: 1KHz ~ 25KHz
调光曲线: 4种
内置程序: 多种宏, 色卡
钨丝灯效果: 可开启和关闭

控制

通道: 20种通道模式
通讯协议: DMX512, RDM
电源接口: 西尚 True1 进出
信号接口: 西尚 三芯t和五芯信号进出
显示: 液晶触摸屏

软件

可通过DMX连接电脑来升级程序
智能温控管理系统

结构

压铸铝机身
配备智能调速散热防水风扇
灯与灯之间可通过易用的拼接结构进行多样化的拼接组合
头部具备角度标示可调节

电压功率

输入电源: AC 110V~240V 50/60Hz
额定功率: 500 W

其它

防护等级: IP65
工作温度: $-40^\circ\text{C} \sim 45^\circ\text{C}$
启动环境温度: $-20^\circ\text{C} \sim 45^\circ\text{C}$


尺寸和重量

灯具尺寸: 420 x 200 x 249 mm
灯具净重: 8.8 kg
纸箱包装尺寸: 54x30x25.5 cm
纸箱包装毛重: 10.5 kg




照度图

主光 (Lux)	28,264	4,656	1,916	546
----------	--------	-------	-------	-----

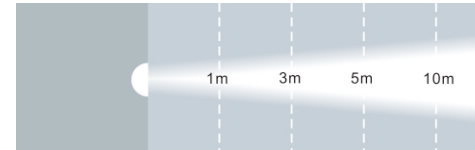


尺寸图

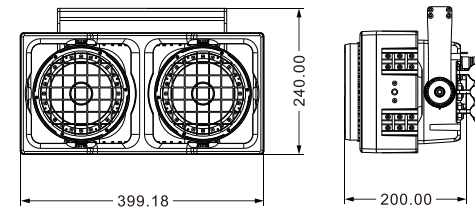

组合



EPIC STROBE

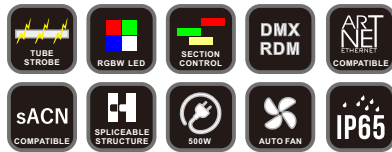

OPTIC

Source: 360x2W 6500K white (Tube LED)
432x2W RGBW 4in1 (Panel LED)
Pixel Section: 5x12 sections (Strobe tube)
2x6 sections (RGBW panel)
Source lifetime:>20,000 H

EFFECT

Strobe: power strobe
Dimming mode: 5 modes
Built-in program: yes

CONTROL & PROGRAM

Channel: 15 / 39 / 71 / 112 / 209 / 178 / 275 / 16
channel modes
Protocol: DMX512, RDM, Art-Net, sACN
Power connector: SEETRONIC True1 In&Out
DMX connector: SEETRONIC 3pin or 5pin XLR
Art-Net connector: SEETRONIC RJ45
Display: TFT LCD touch panel

SOFTWARE

Via DMX signal to update
Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
Intelligent speed control fan
Possibility to connect devices to each other

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
Rated power: 500 W

OTHER

IP rating: IP65
Work environment: -40°C ~ 45°C
Startup environment: -20°C ~ 45°C


SIZE & WEIGHT

Size: 416x156x338 mm
Net weight: 13.0 kg
Packaging size: 56x43x25 cm
Packaging weight: 16.0 kg




PHOTOMETRICS

Strobe tube (Lux)	46,880	6,460	3,092	928
RGB panel (Lux)	5,422	807	390	112

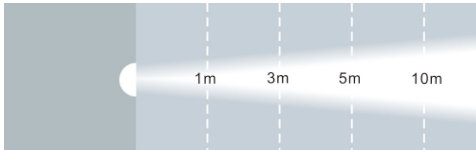

DIMENSION

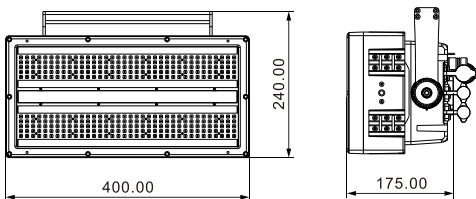

COMBINATIONS



PJ500S



光源

光源: 360x2W 6500K 白光 LED (频闪管)
432x2W RGBW 4合1 LED (背光)
分段: 5x12段 (频闪管)
2x6段 (背光)
光源寿命: >20,000 小时

效果

频闪: 多样频闪效果和爆闪
调光模式: 5种
内置程序: 多种


控制

通道: 15 / 39 / 71 / 112 / 209 / 178 / 275 / 16 通道模式
通讯协议: DMX512, RDM, Art-Net, sACN
电源接口: 西尚 True1 进出
信号接口: 西尚 三芯或五芯信号进出
网络接口: 西尚 RJ45 进出
显示: 液晶触摸屏




照度图

频闪管 (Lux)	46,880	6,460	3,092	928
背光 (Lux)	5,422	807	390	112

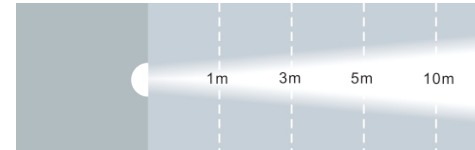

尺寸图

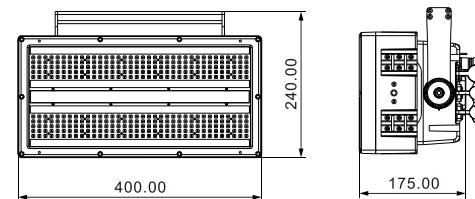

组合



软件

可通过DMX连接电脑来升级程序
智能温控管理系统

结构

压铸铝机身
配备智能调速散热防水风扇
灯与灯之间可通过易用的拼接结构进行多样化的拼接组合

电压功率

输入电源: AC 110V~240V 50/60Hz
额定功率: 500 W

其它

防护等级: IP65
工作温度: -40°C ~ 45°C
启动环境温度: -20°C ~ 45°C

尺寸和重量


灯具尺寸: 415 × 156 × 338 mm
灯具净重: 13.0 kg
纸箱包装尺寸: 56x43x25 cm
纸箱包装毛重: 16.0 kg




ACED2420S




PHOTOMETRICS

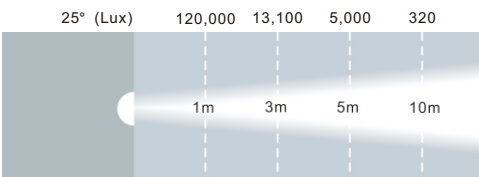


DIMENSION

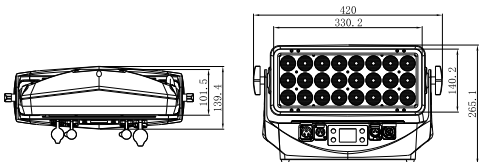

PIXEL SECTIONS



OPTIONAL ACCESSORIES

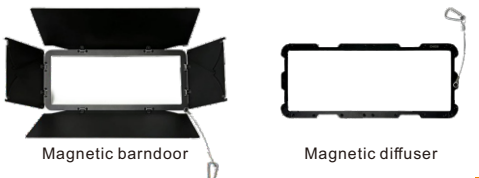

OPTIC

Source: 24x20W RGBW LED
 Beam angle: 5°/10°/15°/25°/40°/15°x40° (optional)
 CCT: 2000K ~ 8000K
 Source lifetime: >50,000 H

EFFECT

Strobe: 1~25HZ
 Dimming frequency: 1KHZ / 24KHZ
 Dimming curves: Linear / Exponential / S-Curve / Logarithmic

CONTROL & PROGRAM

Channel: 8 / 13 / 16 / 21 / 25 / 40 / S3 / S4 / S6 RAW / S6 Default / S8 / S9 / S10 / S18 / S21 Strobe / S24 / S26 / S27 / S21 Studio / S40 / S25 / S35 / S22 channel modes
 Protocol: DMX512, RDM
 W-DMX: LumenRadio (optional)
 Power connector: SEETRONIC True1 In&Out
 DMX connector: SEETRONIC 3pin or 5pin XLR
 Display: TFT LCD touch panel

SOFTWARE

Via DMX signal to update
 Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
 Intelligent speed control fan

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
 Rated power: 600 W

OTHER

IP rating: IP65
 Work environment: -40°C ~ 45°C
 Startup environment: -20°C ~ 45°C

SIZE & WEIGHT


Size: 420x140x265 mm
 Net weight: 6.6 kg
 Packaging size: 54x32x22 cm
 Packaging weight: 9.0 kg




ACED2420S




照度图

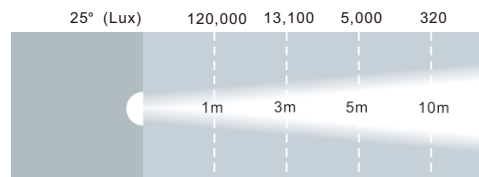

尺寸图

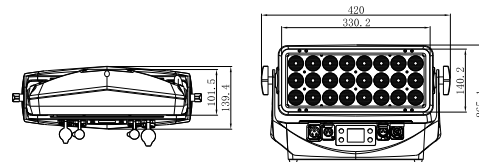

分段顺序



选配件



光源

光源: 24x20W RGBW 4合1 LED
 透镜角度: 5° / 10° / 15° / 25° / 40° / 15° x 40° (可选)
 色温: 2000K ~ 8000K
 光源寿命: >50,000 小时

效果

频闪: 1~25HZ
 调光频率: 1KHZ / 24KHZ
 调光曲线: 4种

控制

通道: 8 / 13 / 16 / 21 / 25 / 40 / S3 / S4 / S6 RAW / S6 Default / S8 / S9 / S10 / S18 / S21 Strobe / S24 / S26 / S27 / S21 Studio / S40 / S25 / S35 / S22 通道模式
 通讯协议: DMX512, RDM
 无线: 瑞典LumenRadio (可选)
 电源接口: 西尚 True1 进出
 信号接口: 西尚 三芯或五芯信号进出
 显示: 液晶触摸屏

软件

可通过DMX连接电脑来升级程序
 智能温控管理系统

结构

压铸铝机身
 配备智能调速散热防水风扇

电压功率

输入电源: AC 110V~240V 50/60Hz
 额定功率: 600 W

其它

防护等级: IP65
 工作温度: -40°C ~ 45°C
 启动环境温度: -20°C ~ 45°C

尺寸和重量

灯具尺寸: 420 x 140 x 265 mm
 灯具净重: 6.6 kg
 纸箱包装尺寸: 54x32x22 cm
 纸箱包装毛重: 9.0 kg




ACED2420




PHOTOMETRICS


25° (Lux) 83,600 9,660 3,740 206

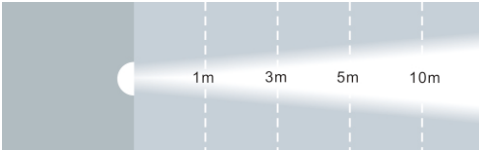

DIMENSION

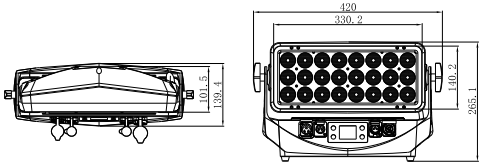

OPTIONAL ACCESSORIES

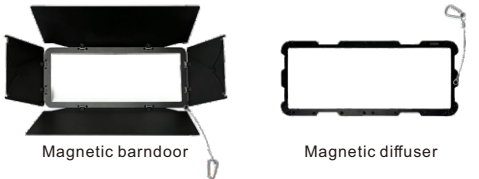

Magnetic barndoor

Magnetic diffuser

OPTIC

Source: 24x20W RGBLAC LED
 Beam angle: 5°/10°/15°/25°/40°/15°x40° (optional)
 CCT: 2000K ~ 8000K
 Source lifetime: >50,000 H

EFFECT

Strobe: 1~25HZ
 Dimming frequency: 1KHz / 24KHz
 Dimming curves: Linear / Exponential / S-Curve / Logarithmic

CONTROL & PROGRAM

Channel: 10 / 14 / 17 / 21 channel modes
 Protocol: DMX512, RDM
 W-DMX: LumenRadio (optional)
 Power connector: SEETRONIC True1 In&Out
 DMX connector: SEETRONIC 3pin or 5pin XLR
 Display: TFT LCD touch panel

SOFTWARE

Via DMX signal to update
 Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
 Intelligent speed control fan

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
 Rated power: 600 W

OTHER

IP rating: IP65
 Work environment: -40°C ~ 45°C
 Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

Size: 420×140×265 mm
 Net weight: 6.6 kg
 Packaging size: 54x32x22 cm
 Packaging weight: 9.0 kg




ACED2420




照度图

25° (Lux) 83,600 9,660 3,740 206

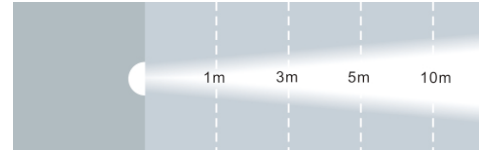

尺寸图

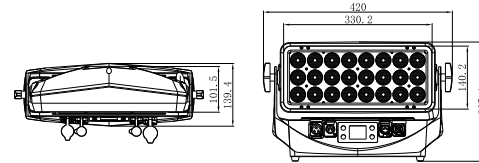

选配件



磁吸挡光页

磁吸扩散板

光源

光源: 24x20W RGBLAC 6合1 LED
 透镜角度: 5°/10°/15°/25°/40°/15°x40° (可选)
 色温: 2000K ~ 8000K
 光源寿命: >50,000 小时

效果

频闪: 1~25HZ
 调光频率: 1KHz / 24KHz
 调光曲线: 4种

控制

通道: 10 / 14 / 17 / 21 通道模式
 通讯协议: DMX512, RDM
 无线: 瑞典LumenRadio (可选)
 电源接口: 西尚 True1 进出
 信号接口: 西尚 三芯或五芯信号进出
 显示: 液晶触摸屏

软件

可通过DMX连接电脑来升级程序
 智能温控管理系统

结构

压铸铝机身
 配备智能调速散热防水风扇

电压功率

输入电源: AC 110V~240V 50/60Hz
 额定功率: 600 W

其它

防护等级: IP65
 工作温度: -40°C ~ 45°C
 启动环境温度: -20°C ~ 45°C

尺寸和重量

灯具尺寸: 420 × 140 × 265 mm
 灯具净重: 6.6 kg
 纸箱包装尺寸: 54x32x22 cm
 纸箱包装毛重: 9.0 kg



ACED4820S



OPTIC

Source: 48x20W RGBW LED
 Beam angle: 5°/10°/15°/25°/40°/15°x40° (optional)
 CCT: 2000K ~ 8000K
 Source lifetime: >50,000 H

EFFECT

Strobe: 1~25HZ
 Dimming frequency: 1KHz / 24KHz
 Dimming curves: Linear / Exponential / S-Curve / Logarithmic

CONTROL & PROGRAM

Channel: 8 / 13 / 16 / 21 / 33 / 48 / S3 / S4 / S6 R / S6D / S8 / S9 / S10 / S24 / S27 / S30 / S32 / S35 / S21 / S52 channel modes
 Protocol: DMX512, RDM
 W-DMX: LumenRadio (optional)
 Power connector: SEETRONIC True1 In&Out
 DMX connector: SEETRONIC 3pin or 5pin XLR
 Display: TFT LCD touch panel

SOFTWARE

Via DMX signal to update
 Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
 Intelligent speed control fan

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
 Rated power: 1100 W

OTHER

IP rating: IP65
 Work environment: -40°C ~ 45°C
 Startup environment: -20°C ~ 45°C


SIZE & WEIGHT

Size: 570x150x320 mm
 Net weight: 10.6 kg
 Packaging size: 70x36x25 cm
 Packaging weight: 14.0 kg




PHOTOMETRICS


25° (Lux) 213,000 42,500 16,200 1,815

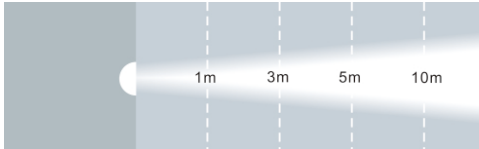


DIMENSION

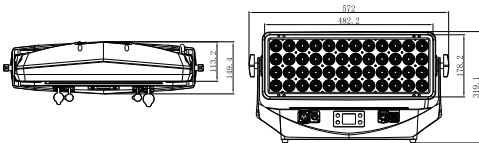

PIXEL SECTIONS



OPTIONAL ACCESSORIES

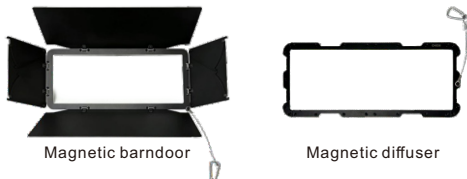

Magnetic barndoor

Magnetic diffuser

ACED4820S



光源

光源: 48x20W RGBW 4合1 LED
 透镜角度: 5° / 10° / 15° / 25° / 40° / 15° x40° (可选)
 色温: 2000K ~ 8000K
 光源寿命: >50,000 小时

效果

频闪: 1~25HZ
 调光频率: 1KHz / 24KHz
 调光曲线: 4种

控制

通道: 8 / 13 / 16 / 21 / 33 / 48 / S3 / S4 / S6 R / S6D / S8 / S9 / S10 / S24 / S27 / S30 / S32 / S35 / S21 / S52 通道模式
 通讯协议: DMX512, RDM
 无线: 瑞典LumenRadio (可选)
 电源接口: 西尚 True1 进出
 信号接口: 西尚 三芯或五芯信号进出
 显示: 液晶触摸屏

软件

可通过DMX连接电脑来升级程序
 智能温控管理系统

结构

压铸铝机身
 配备智能调速散热防水风扇

电压功率

输入电源: AC 110V~240V 50/60Hz
 额定功率: 1100 W

其它

防护等级: IP65
 工作温度: -40°C ~ 45°C
 启动环境温度: -20°C ~ 45°C


尺寸和重量

灯具尺寸: 570 × 150 × 320 mm
 灯具净重: 10.6 kg
 纸箱包装尺寸: 70x36x25 cm
 纸箱包装毛重: 14.0 kg




照度图


25° (Lux) 213,000 42,500 16,200 1,815

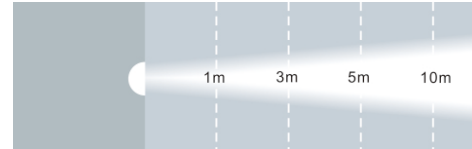

尺寸图

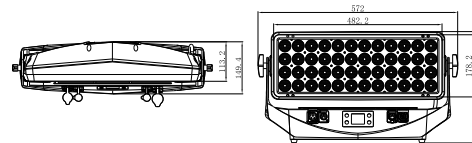

分段顺序



选配件



磁吸挡光页

磁吸扩散板

ACED4820



OPTIC

Source: 48x20W RGBLAC LED
 Beam angle: 5°/10°/15°/25°/40°/15°x40° (optional)
 CCT: 2000K ~ 8000K
 Source lifetime: >50,000 H

EFFECT

Strobe: 1~25HZ
 Dimming frequency: 1KHz / 24KHz
 Dimming curves: Linear / Exponential / S-Curve / Logarithmic

CONTROL & PROGRAM

Channel: 10 / 14 / 17 / 21 channel modes
 Protocol: DMX512, RDM
 W-DMX: LumenRadio (optional)
 Power connector: SEETRONIC True1 In&Out
 DMX connector: SEETRONIC 3pin or 5pin XLR
 Display: TFT LCD touch panel

SOFTWARE

Via DMX signal to update
 Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
 Intelligent speed control fan

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
 Rated power: 1100 W

OTHER

IP rating: IP65
 Work environment: -40°C ~ 45°C
 Startup environment: -20°C ~ 45°C


SIZE & WEIGHT

Size: 570x150x320 mm
 Net weight: 10.6 kg
 Packaging size: 70x36x25 cm
 Packaging weight: 14.0 kg




PHOTOMETRICS


25° (Lux) 142,000 19,130 7,345 822

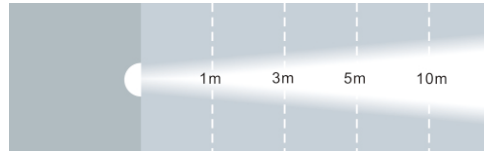

DIMENSION

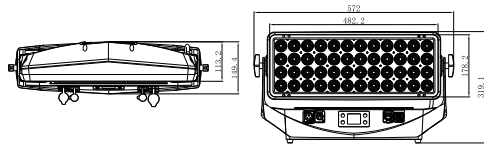

OPTIONAL ACCESSORIES

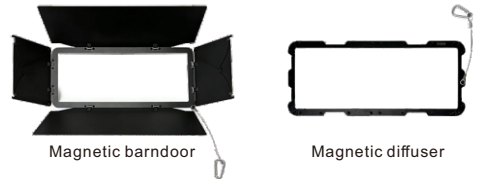

Magnetic barndoor

Magnetic diffuser

ACED4820



光源

光源: 48x20W RGBLAC 6合1 LED
 透镜角度: 5° / 10° / 15° / 25° / 40° / 15° x40° (可选)
 色温: 2000K ~ 8000K
 光源寿命: >50,000 小时

效果

频闪: 1~25HZ
 调光频率: 1KHz / 24KHz
 调光曲线: 4种

控制

通道: 10 / 14 / 17 / 21 通道模式
 通讯协议: DMX512, RDM
 无线: 瑞典LumenRadio (可选)
 电源接口: 西尚 True1 进出
 信号接口: 西尚 三芯或五芯信号进出
 显示: 液晶触摸屏

软件

可通过DMX连接电脑来升级程序
 智能温控管理系统

结构

压铸铝机身
 配备智能调速散热防水风扇

电压功率

输入电源: AC 110V~240V 50/60Hz
 额定功率: 1100 W

其它

防护等级: IP65
 工作温度: -40°C ~ 45°C
 启动环境温度: -20°C ~ 45°C


尺寸和重量

灯具尺寸: 570 × 150 × 320 mm
 灯具净重: 10.6 kg
 纸箱包装尺寸: 70x36x25 cm
 纸箱包装毛重: 14.0 kg




照度图

25° (Lux) 142,000 19,130 7,345 822

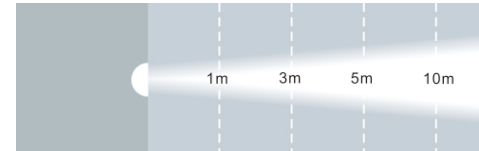

尺寸图

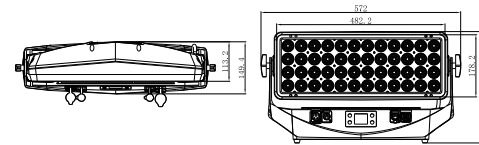


选配件




磁吸挡光页

磁吸扩散板


EPIC PAR

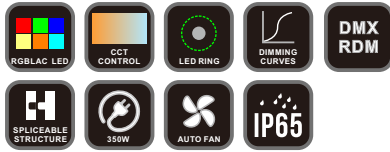

PHOTOMETRICS

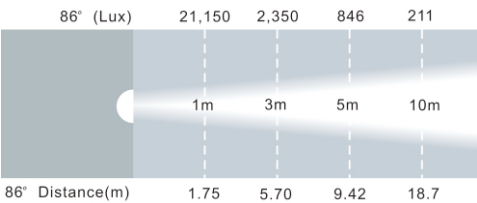


DIMENSION

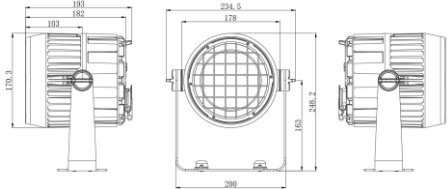

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES

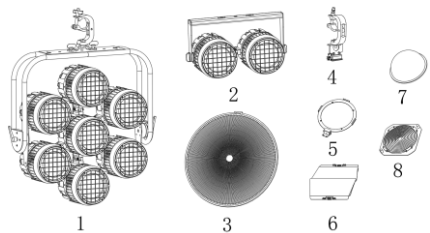

OPTIC

Source: 540W RGBALC LED (Main light)
64x0.2W RGB LED (Led ring)
Beam angle: 55°
Field angle: 86°
CCT: 1800K ~ 8500K
CRI: 92+
Source lifetime: >20,000 H

EFFECT

Strobe: 1~25HZ
Dimming frequency: 900Hz~25KHz

CONTROL & PROGRAM

Channel: 1/2/3/4/6/7/13/21/RGB10/RGB15/
CMY15/9/29 channel modes
Protocol: DMX512, RDM
Power connector: REAN True1 In&Out
DMX connector: REAN 3pin or 5pin XLR
Display: OLED display

SOFTWARE

Via DMX signal to update
Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
Possibility to connect devices to each other
Silent fan

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
Rated power: 350 W

OTHER

IP rating: IP65
Work environment: -40°C ~ 45°C
Startup environment: -20°C ~ 45°C


SIZE & WEIGHT

Size: 235x249x193 mm
Net weight: 4.0 kg
Packaging size: 22x22x33 cm (1pc)
46x24x35.5cm (2in1)
Packaging weight: 5.1 kg (1pc)
10.8 kg (2in1)


EPIC PAR



照度图

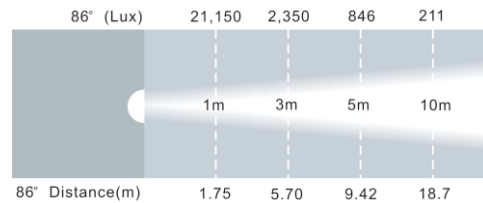


尺寸图

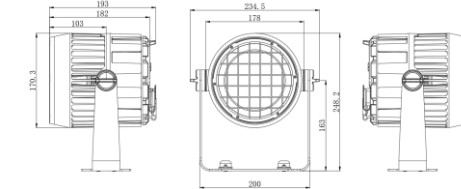

标配件



选配件

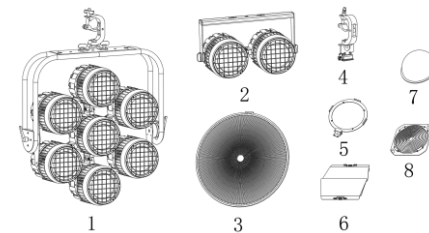

光源

光源: 540W RGBALC 6合1 LED (主光)
64x0.2W RGB 3合1 LED (光圈)
光束角度: 55°
光斑角度: 86°
色温: 1800K ~ 8500K
显指: 92+
光源寿命: >20,000 小时

效果

频闪: 1~25HZ
调光频率: 900Hz~25KHz

控制

通道: 1/2/3/4/6/7/13/21/RGB10/RGB15/CMY15/
9/29 通道模式
通讯协议: DMX512, RDM
电源接口: REAN True1 进出
信号接口: REAN 三芯或五芯信号进出
显示: OLED触摸屏

软件

可通过DMX连接电脑来升级程序
智能温控管理系统

结构

压铸铝机身
可拼接结构, 多种拼接组合方式
配备智能调速散热防水风扇

电压功率

输入电源: AC 110V~240V 50/60Hz
额定功率: 350 W

其它

防护等级: IP65
工作温度: -40°C ~ 45°C
启动环境温度: -20°C ~ 45°C

尺寸和重量

灯具尺寸: 235 × 249 × 193 mm
灯具净重: 4.0 kg
纸箱包装尺寸: 22x22x33 cm (1装1)
46x24x35.5 cm (1装2)
纸箱包装毛重: 5.1 kg (1装1)
10.8 kg (1装2)

FLAMINGO PAR



OPTIC

Source: 7x40W RGBW 4in1 LED
 Beam angle: 5~30°
 Source lifetime: >50,000 H

EFFECT

Strobe: 1~25HZ
 Dimmer mode: 5
 Electronic dimming
 Electric zoom and rotating

CONTROL & PROGRAM

Channel: 6 / 13 channel modes
 Protocol: DMX512, RDM
 Power connector: SEETRONIC True1 In&Out
 DMX connector: SEETRONIC 3pin or 5pin XLR
 Display: TFT LCD touch panel

SOFTWARE

Via DMX signal to update
 Intelligent temperature protection management

HOUSING

Aluminum alloy die-casting structure
 Intelligent speed control fan
 Bracket yoke

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
 Rated power: 300 W

OTHER

IP rating: IP65
 Work environment: -40°C ~ 45°C
 Startup environment: -20°C ~ 45°C


SIZE & WEIGHT

Size: 287x262x318 mm
 Net weight: 5.6 kg
 Packaging size: 28x28x49 cm
 Packaging weight: 7.2 kg




PHOTOMETRICS

Narrow angle (Lux)	149,802	32,071	15,179	4,020
Wide angle (Lux)	32,699	4,163	1,560	512

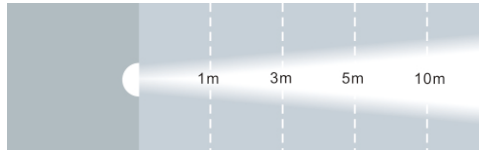

DIMENSION

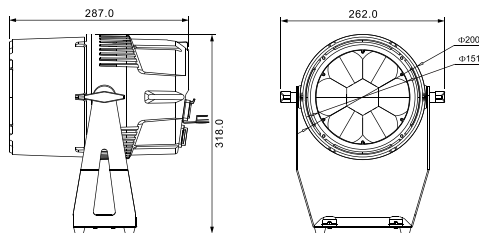

FLAMINGO PAR



光源

光源: 7X40W RGBW 4合1 LED
 光束角度: 5~30°
 光源寿命: >50,000 小时

效果

频闪: 1~25HZ
 调光模式: 5种
 电子调光
 电子变焦和旋转

控制

通道: 6 / 13 通道模式
 通讯协议: DMX512, RDM
 电源接口: 西尚 True1 进出
 信号接口: 西尚 三芯或五芯信号进出
 显示: 液晶触摸屏

软件

可通过DMX连接电脑来升级程序
 智能温控管理系统

结构

压铸铝机身
 配备智能调速散热防水风扇
 快速锁式可站立提手

电压功率

输入电源: AC 110V~240V 50/60Hz
 额定功率: 300 W

其它

防护等级: IP65
 工作温度: -40°C ~ 45°C
 启动环境温度: -20°C ~ 45°C


尺寸和重量

灯具尺寸: 287 × 262 × 318 mm
 灯具净重: 5.6 kg
 纸箱包装尺寸: 28x28x49 cm
 纸箱包装毛重: 7.2 kg




照度图

小角度 (Lux)	149,802	32,071	15,179	4,020
大角度 (Lux)	32,699	4,163	1,560	512

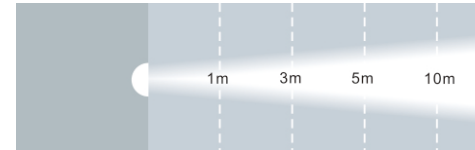

尺寸图

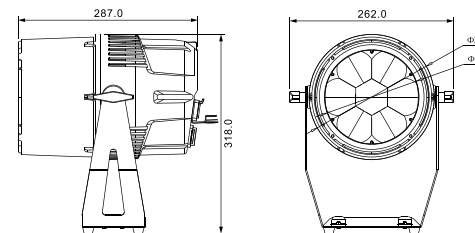



PATT IP



OPTIC

Source: 540W RGBLAC LED (Main light)
 36x3W RGB LED (Aura light)
 90x0.5W RGB LED (Led ring)
 Beam angle: 55°
 Field angle: 86°
 CCT: 1800K ~ 8500K
 CRI: 92+
 Source lifetime: >20,000 H

EFFECT

Strobe: 1~25HZ
 Dimming frequency: 900Hz~25KHz

CONTROL & PROGRAM

Channel: 1 / 3 / 14 / 23 / 35 / 22 / 27 / 12 / 37
 channel modes
 Protocol: DMX512, RDM
 Power connector: REAN True1 In&Out
 DMX connector: REAN 3pin or 5pin XLR
 Display: OLED display

SOFTWARE

Via DMX signal to update
 Intelligent temperature protection management

HOUSING

Stainless steel+aluminum alloy structure
 Aluminum alloy heat dissipation+silent fan

POWER CONSUMPTION

Input voltage: AC 110V~240V 50/60Hz
 Rated power: 600 W

OTHER


IP rating: IP54
 Work environment: -40°C ~ 45°C
 Startup environment: -20°C ~ 45°C

SIZE & WEIGHT


Size: 632x652x325 mm
 Net weight: 12.7 kg
 Packaging size: 57.5x35.5x60.5 cm
 Packaging weight: 15.5 kg



PHOTOMETRICS

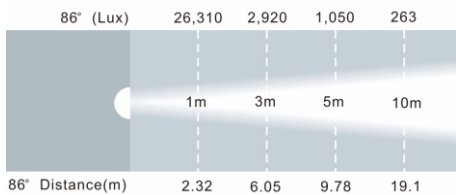

DIMENSION

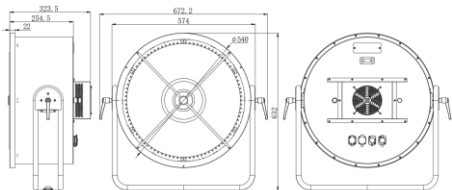

STANDARD ACCESSORIES



PATT IP



光源

光源: 540W RGBWAL 6合1 LED (主光)
 36x3W RGB 3合1 LED (回光)
 90x0.5W RGB 3合1 LED (光圈)
 光束角度: 55°
 光斑角度: 86°
 色温: 1800K ~ 8500K
 显指: 92+
 光源寿命: >20,000 小时

效果

频闪: 1~25HZ
 调光频率: 900Hz~25KHz

控制

通道: 1 / 3 / 14 / 23 / 35 / 22 / 27 / 12 / 37 通道模式
 通讯协议: DMX512, RDM
 电源接口: REAN True1 进出
 信号接口: REAN 三芯或五芯信号进出
 显示: OLED触摸屏

软件

可通过DMX连接电脑来升级程序
 智能温控管理系统

结构

不锈钢+铝合金机身
 铝合金散热器+静音防水风扇

电压功率

输入电源: AC 110V~240V 50/60Hz
 额定功率: 600 W

其它


防护等级: IP54
 工作温度: -40°C ~ 45°C
 启动环境温度: -20°C ~ 45°C

尺寸和重量


灯具尺寸: 632 × 652 × 325 mm
 灯具净重: 12.7 kg
 纸箱包装尺寸: 57.5x35.5x60.5 cm
 纸箱包装毛重: 15.5 kg



照度图

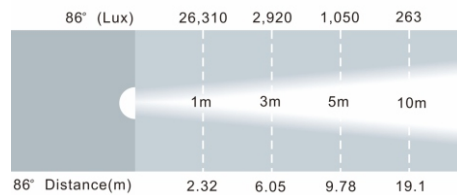

尺寸图

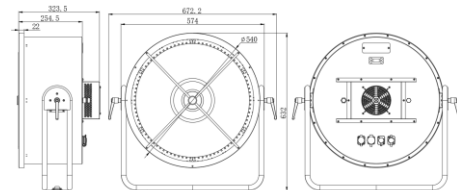

标配件





FOLLOW 1200 IP



OPTIC

Source: 1,200W LED
Output: 6,6000 lm
Beam angle: 4.5 ~ 25°
CCT: 8100K
Lens diameter: 200 mm
Source lifetime: >20,000h

EFFECT

Strobe: 1 ~ 25Hz
Dimming frequency: 3KHz~ 25KHz
Electronic Color wheel: Open/H-CRI/Red/Yellow/
Blue/Green/Orange
Electronic CCT wheel: 3000K~8500K
Electronic Iris
Electronic dimming
Dimmer curve: 4
Electric zoom and focusing

CONTROL & PROGRAM

Control channel: 7 / 10 channel modes
Protocol: DMX512, RDM
Power connector: REAN True1 In
DMX connector: REAN 3pin or 5pin XLR
Display: 2.8-inch display + key knob operation panel
Manual control: button and knob operation panel

SOFTWARE

DMX signal to update
Silent fan, intelligent speed regulation
Intelligent temperature protection to ensure LED service life

HOUSING

Stainless steel+aluminum alloy structure
Aluminum alloy heat dissipation+silent fan

POWER CONSUMPTION

Input voltage: AC 100V~240V 50/60Hz
Rated power: 1500 W

OTHER

IP rating: IP54
Work environment: -40°C ~ 45°C
Startup environment: -20°C ~ 45°C




PHOTOMETRICS


4.5° (Lux)	279,600	69,900	17,470	2,798	670
25° (Lux)	11,400	2,850	713	114	29
	5m	10m	20m	50m	100m
4.5° Distance(m)	0.39	0.78	1.56	3.9	7.8
25° Distance(m)	2.22	4.43	8.86	22.1	44.3

DIMENSION

Size: 842 × 305 × 330mm
Net weight: 26kg

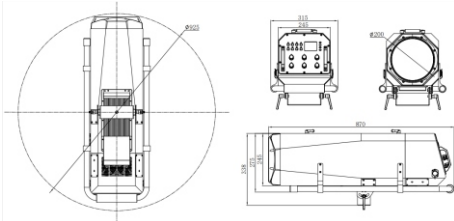

HAND CONTROL PANEL



FOLLOW 1200 IP



光源

光源: 1,200W LED
输出: 6,6000lm
光束角度: 4.5~25°
色温: 8100K
镜头直径: 200mm
光源寿命: >20,000 小时

效果

频闪: 1~25HZ
调光频率: 3KHz~25KHz
电子色盘: 白光/H-CRI/红/黄/蓝/绿/橙
电子色温盘: 3000K~8500K
电子光圈
电子调光
调光曲线: 4种
电子变焦和调焦




照度图


4.5° (Lux)	279,600	69,900	17,470	2,798	670
25° (Lux)	11,400	2,850	713	114	29
	5m	10m	20m	50m	100m
4.5° Distance(m)	0.39	0.78	1.56	3.9	7.8
25° Distance(m)	2.22	4.43	8.86	22.1	44.3

尺寸图

尺寸: 842 × 305 × 330mm
净重: 26kg

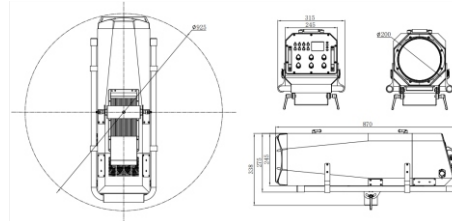

控制面板



控制

通道: 7 / 10 通道模式
通讯协议: DMX512, RDM
电源接口: REAN True1 进
信号接口: REAN 三芯或五芯信号进出
显示: 2.8英寸显示屏
操作: 按键+旋钮操作面板

软件

可通过DMX连接电脑来升级程序
智能温控管理系统

结构

不锈钢+铝合金机身
铝合金散热器+静音防水风扇

电压功率

输入电源: AC 100V~240V 50/60Hz
额定功率: 1500 W

其它

防护等级: IP54
工作温度: -40°C ~ 45°C
启动环境温度: -20°C ~ 45°C